

**SWC Series**  
String wound cartridges

- ✓ Made with FDA CFR 21 approved material
- ✓ Manufactured from 100% Polypropylene Cord
- ✓ Reduces sand, silt, rust and scale particles
- ✓ NSF standard 42, 61 & 372 certified
- ✓ High dirt holding capacity



**HYDRONIX SWC SERIES STRING WOUND CARTRIDGES**

a cost effective solution for the reduction of sand, silt, rust, dirt and scale particles. Made from 100% Polypropylene cord, SWC Series String Wound Cartridges can withstand temperatures of up to 165°F (73.9°C).

**HYDRONIX SWC SERIES STRING WOUND CARTRIDGES**

are suitable for a variety of applications including residential and commercial applications using both municipal and well water. Different wound patterns for different micron ratings ensure that you are getting the right product for the right application.



This filter cartridge is tested and certified by NSF International to NSF/ANSI Standard 42 for material requirements only and NSF/ANSI/CAN 61, NSF/ANSI 372.

**COMPONENT**

2.5" DIAMETER SPECIFICATIONS							
	Part Number	Description	Micron Rating	Case Quantity	Box Dimension (Inches)	Weight (lbs)	Weight (kgs)
<b>10"</b>	SWC-25-10-0.5	2.5" x 9.875"	.5	40	13 x 11 x 21	17.2	7.80
	SWC-25-1001	2.5" x 9.875"	1	40	13 x 11 x 21	17.2	7.80
	SWC-25-1005	2.5" x 9.875"	5	40	13 x 11 x 21	17.2	7.80
	SWC-25-1010	2.5" x 9.875"	10	40	13 x 11 x 21	17.2	7.80
	SWC-25-1020	2.5" x 9.875"	20	40	13 x 11 x 21	17.2	7.80
	SWC-25-1030	2.5" x 9.875"	30	40	13 x 11 x 21	17.2	7.80
	SWC-25-1050	2.5" x 9.875"	50	40	13 x 11 x 21	17.2	7.80
	SWC-25-10100	2.5" x 9.875"	100	40	13 x 11 x 21	17.2	7.80
<b>20"</b>	SWC-25-20-0.5	2.5" x 20"	.5	20	13 x 11 x 21	15.4	7
	SWC-25-2001	2.5" x 20"	1	20	13 x 11 x 21	15.4	7
	SWC-25-2005	2.5" x 20"	5	20	13 x 11 x 21	15.4	7
	SWC-25-2010	2.5" x 20"	10	20	13 x 11 x 21	15.4	7
	SWC-25-2020	2.5" x 20"	20	20	13 x 11 x 21	15.4	7
	SWC-25-2030	2.5" x 20"	30	20	13 x 11 x 21	15.4	7
	SWC-25-2050	2.5" x 20"	50	20	13 x 11 x 21	15.4	7
	SWC-25-20100	2.5" x 20"	100	20	13 x 11 x 21	15.4	7
<b>30"</b>	SWC-25-3001	2.5" x 30"	1	20	13 x 11 x 31	23.1	10.50
	SWC-25-3005	2.5" x 30"	5	20	13 x 11 x 31	23.1	10.50
	SWC-25-3010	2.5" x 30"	10	20	13 x 11 x 31	23.1	10.50
	SWC-25-3020	2.5" x 30"	20	20	13 x 11 x 31	23.1	10.50
	SWC-25-3030	2.5" x 30"	30	20	13 x 11 x 31	23.1	10.50
	SWC-25-3050	2.5" x 30"	50	20	13 x 11 x 31	23.1	10.50
	SWC-25-30100	2.5" x 30"	100	20	13 x 11 x 31	23.1	10.50
<b>40"</b>	SWC-25-4001	2.5" x 40"	1	20	13 x 11 x 41	38	17.27
	SWC-25-4005	2.5" x 40"	5	20	13 x 11 x 41	38	17.27
	SWC-25-4010	2.5" x 40"	10	20	13 x 11 x 41	38	17.27
	SWC-25-4020	2.5" x 40"	20	20	13 x 11 x 41	38	17.27
	SWC-25-4030	2.5" x 40"	30	20	13 x 11 x 41	38	17.27
	SWC-25-4050	2.5" x 40"	50	20	13 x 11 x 41	38	17.27
	SWC-25-40100	2.5" x 40"	100	20	13 x 11 x 41	38	17.27
<b>50"</b>	SWC-25-5005	2.5" x 50"	5	20	13 x 11 x 51	52	23.59

4.5" DIAMETER SPECIFICATIONS							
	Part Number	Description	Micron Rating	Case Quantity	Box Dimension (Inches)	Weight (lbs)	Weight (kgs)
10"	SWC-45-10-0.5	4.5" x 9.875"	.5	12	14 x 10 x 21	19.4	8.8
	SWC-45-1001	4.5" x 9.875"	1	12	14 x 10 x 21	19.4	8.8
	SWC-45-1005	4.5" x 9.875"	5	12	14 x 10 x 21	19.4	8.8
	SWC-45-1010	4.5" x 9.875"	10	12	14 x 10 x 21	19.4	8.8
	SWC-45-1020	4.5" x 9.875"	20	12	14 x 10 x 21	19.4	8.8
	SWC-45-1030	4.5" x 9.875"	30	12	14 x 10 x 21	19.4	8.8
	SWC-45-1050	4.5" x 9.875"	50	12	14 x 10 x 21	19.4	8.8
	SWC-45-10100	4.5" x 9.875"	100	12	14 x 10 x 21	19.4	8.8
20"	SWC-45-20-0.5	4.5" x 20"	.5	6	14 x 10 x 21	17.6	8
	SWC-45-2001	4.5" x 20"	1	6	14 x 10 x 21	17.6	8
	SWC-45-2005	4.5" x 20"	5	6	14 x 10 x 21	17.6	8
	SWC-45-2010	4.5" x 20"	10	6	14 x 10 x 21	17.6	8
	SWC-45-2020	4.5" x 20"	20	6	14 x 10 x 21	17.6	8
	SWC-45-2030	4.5" x 20"	30	6	14 x 10 x 21	17.6	8
	SWC-45-2050	4.5" x 20"	50	6	14 x 10 x 21	17.6	8
	SWC-45-20100	4.5" x 20"	100	6	14 x 10 x 21	17.6	8

\*WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. \*Special lengths and diameter available.

### HYDRONIX SWC SERIES STRING WOUND CARTRIDGES

are made with 100% pure polypropylene and are free of surfactants, detergents and anti-static agents. SWC series filter cartridges do not impart any substances into water which are known to or can cause adverse health effects to humans. SWC polypropylene media complies with the appropriate U.S. Food and Drug Administration guidelines, as outlined in the Code of Federal regulations, Title 21, Sections 177.1520 (a), (1) and Section 177.1520 (c), (1.1).

#### Materials of Construction

Filter Media: Polypropylene Fiber Cord  
Core: Polypropylene


#### Temperature Rating

Temperature Range: 40 °F to 165 °F (4.4 °C to 73.9 °C)


#### Suggested Differential Pressure

30 psig maximum - dirty  
10-15 psig optimum - change out

#### Distributed by:



### SWC Series Sediment Cartridges

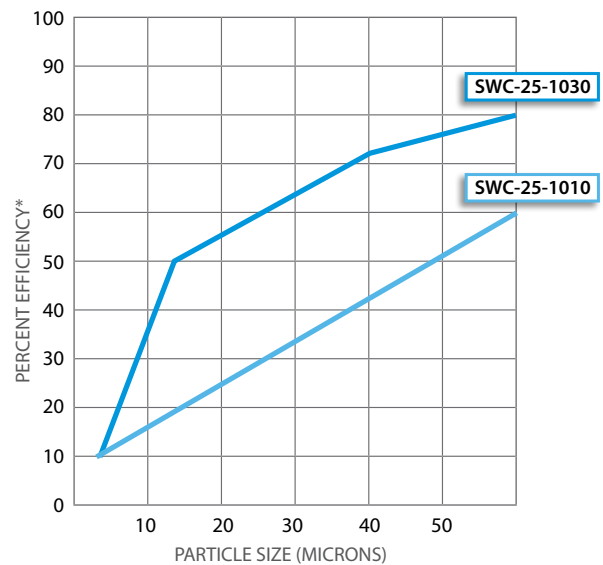

**JUST ADD WATER™**

P.O. Box 2235 Chino Hills, CA 91709 | USA  
sales@hydronixwater.com • www.HydronixWater.com